


Casar Parafit

Product information



Advantages and features:

- Extremely high breaking strength
- Very stabile wire rope construction with good fatigue properties
- A plastic layer between inner and outer strands prevents inner wear and protects the core from corrosion.
- Very high resistance against flattening and wear.
- Especially suitable for multiple layer spooling.

ISO 4309 Rope Category No: 8-50mm **RCN.09**,


Rope construction: 8 strand hammered rope in parallel lay construction made out of compacted outer strands. Has a plastic layer between the steel core and the outer strands, giving the rope a high structural s

Marking: According to standard

Standard: EN 12385-4
AS 3569

Fill factor: 0.74

RCN: 09

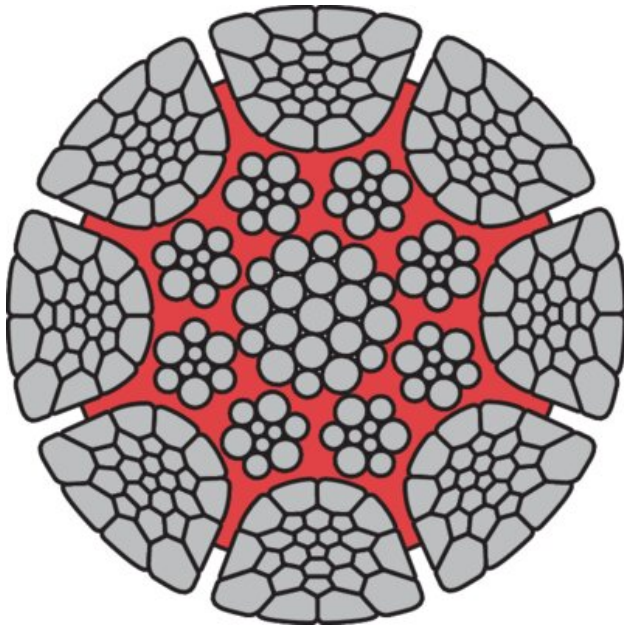

Offshore crane



Crawler crane



Part Code	Rope diameter mm	Steel area mm ²	Min. breaking force		Weight kg/100m
			kN 1960 N/mm ²	kN 2160 N/mm ²	
103100804070129	8	37	63.1	68.7	29
103100904070129	9	46.6	79.4	86.5	37
103101004070129	10	57.1	97.3	106	49
103101104070129	11	71.2	121	132	55

103101204070129	12	82.7	141	154	65
103101304070129	13	97.9	167	182	77
103101404070129	14	115	196	213	89
103101504070129	15	131	223	243	102
103101604070129	16	150	255	278	117
103101704070129	17	171	292	318	132
103101804070129	18	189	323	352	146
103101904070129	19	214	364	397	163
103102004070129	20	234	398	434	181
103102104070129	21	257	437	477	198
103102204070129	22	285	485	529	220
103102304070129	23	310	528	576	240
103102404070129	24	338	576	628	261
103102504070129	25	366	624	680	282
103102604070129	26	394	672	732	307
103102804070129	28	459	783	853	353
103103004070129	30	529	902	983	410
103103204070129	32	598	1019	1110	464
103103404070129	34	679	1157	1261	523
103103604070129	36	758	1292	1407	583
103103804070129	38	848	1446	1576	655
103104004070129	40	935	1594	1736	729

Blueprint

