


MAXIPACT Rotation Resistant Rope



Product information

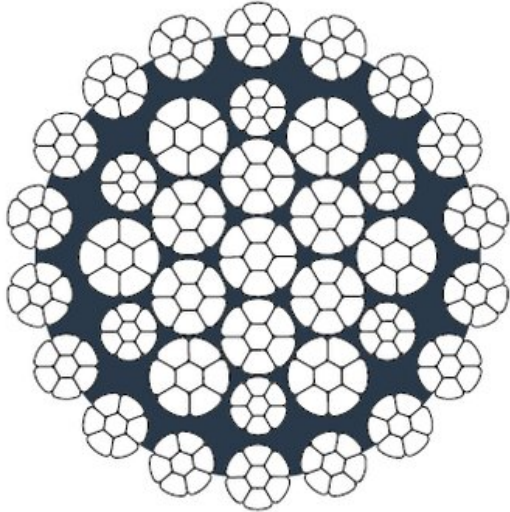

General: Recommended for all cranes and performant lifting devices where non-rotating and high MBL ropes are required. Recommended for offshore, deck cranes and marine environment.

- dia. 12.7 - 52 mm: construction 37xk7
- dia. 54-64 mm: construction 37xk19
- dia. 66-70 mm: construction 37xk26
- tolerance on diameter (EN; +0% +5%)
- available in ordinary lay and Lang's lay
- available in right hand and left hand

Temperature range: -50°C up to +75°C

Fill factor: 0,716

Part Code	Rope diameter	Tensile strength N/mm ²	Steel area mm ²	Min. breaking force kN	Finish	Weight kg/m
104101276270279	12.7	1,960	-	-	Galvanized	-
104101306270279	13	1,960	-	-	Galvanized	-
104101406270279	14	1,960	-	-	Galvanized	-
104101506270279	15	1,960	-	-	Galvanized	-

104101596270279	15.88	1,960	-	-	Galvanized	-
104101606070279	16	1,960	-	-	Bright	-
104101706270279	17	1,960	-	-	Galvanized	-
104101806270279	18	1,960	-	-	Galvanized	-
104101906070279	19	1,960	-	-	Bright	-
104102006270279	20	1,960	-	-	Galvanized	-
104102106270279	21	1,960	-	-	Galvanized	-
104102206270279	22	1,960	-	-	Galvanized	-
104102226270279	22.23	1,960	-	-	Galvanized	-
104102306270279	23	1,960	-	-	Galvanized	-
104102406070279	24	1,960	-	-	Bright	-
104102506270279	25	1,960	-	-	Galvanized	-
104102546300279	25.4	2,160	-	-	Galvanized	-
104102606300279	26	2,160	-	-	Galvanized	-
104102706300279	27	2,160	-	-	Galvanized	-
104102806070279	28	1,960	-	-	Bright	-
104102866300279	28.58	2,160	-	-	Galvanized	-
104102906300279	29	2,160	-	-	Galvanized	-
104103006270279	30	1,960	-	-	Galvanized	-