


MAXIPACT Rotation Resistant Rope



Product information

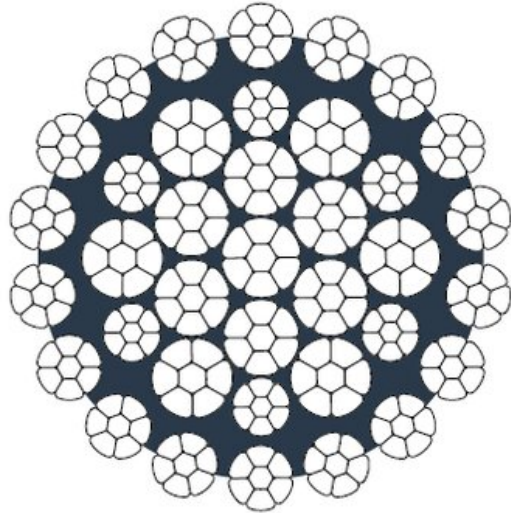

General: Recommended for all cranes and performant lifting devices where non-rotating and high MBL ropes are required. Recommended for offshore, deck cranes and marine environment.

- dia. 12.7 - 52 mm: construction 37xk7
- dia. 54-64 mm: construction 37xk19
- dia. 66-70 mm: construction 37xk26
- tolerance on diameter (EN; +0% +5%)
- available in ordinary lay and Lang's lay
- available in right hand and left hand

Temperature range: -50°C up to +75°C

Fill factor: 0,716

Part Code	Rope diameter	Steel area mm ²	Min. breaking force kN 1960 N/mm ²	Min. breaking force kN 2160 N/mm ²	Weight kg/m
104101276270279	12.7	-	148	155.9	0.77
104101306270279	13	-	157.8	165.7	0.82
104101406270279	14	-	183.3	192.5	0.95

104101506270279	15	-	209.6	220.6	0.97
104101596270279	15.88	-	230	241	1.09
104101606070279	16	144	239	251	1.24
104101706270279	17	-	269.7	283.4	1.4
104101806270279	18	-	302.5	317.7	1.57
104101906070279	19	203	339	356	1.75
104102006270279	20	-	374.2	393	1.93
104102106270279	21	-	412.2	432.9	2.13
104102206270279	22	-	452	474.7	2.33
104102226270279	22.23	-	458	481	2.36
104102306270279	23	-	494.8	519.6	2.55
104102406070279	24	324	540.3	567.4	2.79
104102506270279	25	-	587.1	616.6	3.03
104102546300279	25.4	-	-	625.3	3.08
104102606300279	26	-	-	666.1	3.25
104102706300279	27	-	-	717.9	3.54
104102806070279	28	441	734	771	3.79
104102866300279	28.58	-	-	806.8	3.97
104102906300279	29	-	-	824.4	4.07
104103006270279	30	-	846.3	888.8	4.37